




The extra **POWER**
UPS Tubular Battery

4year
warranty



Low Maintenance • Last 3 Times Longer

INDUSTRIAL

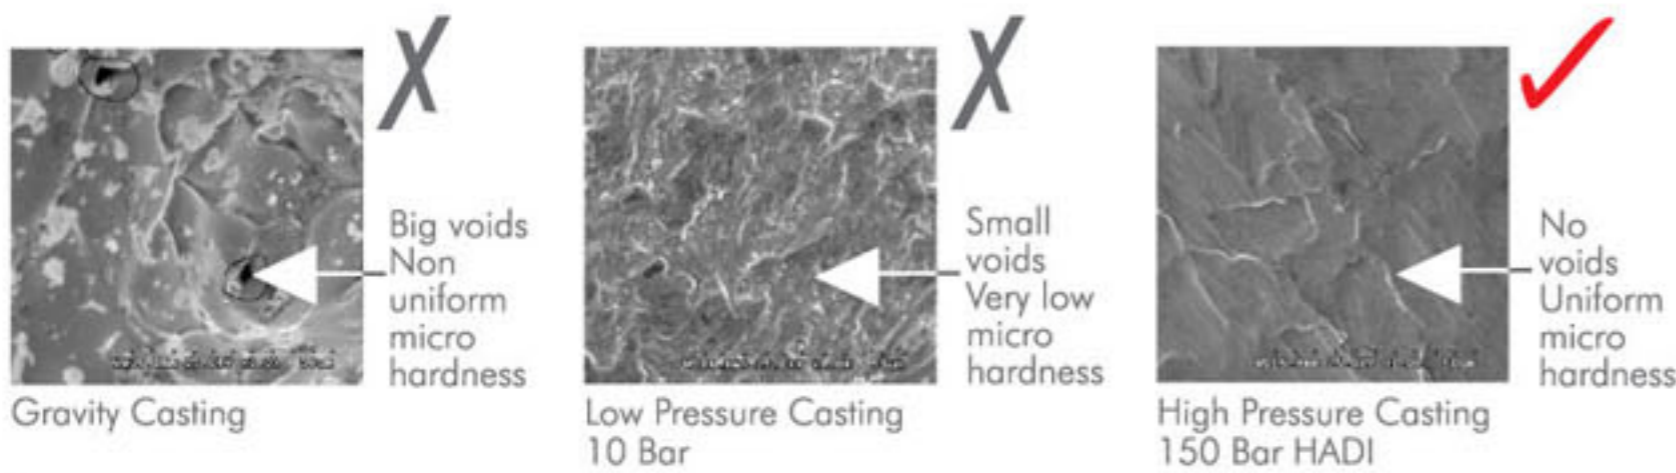

The new EL range are manufactured as per Exide's proprietary Törr Tubular technology using one of the world's most exclusive, advanced and state-of-the-art 'HADI' high pressure spine casting (at 100 bar) machines, which is not commonly available. With our hi-tech R&D center at Kolkata, Exide has developed the high-corrosion resistant and robust spine technology using the HADI process, which ensures a super fine grain structure, for strength, long life and highest reliability.

Applications

- UPS System ● Telecommunication Systems ● Office Automation Equipment ● Fire Alarm & Security Systems ● Electronic PABX Systems ● Cable Television Equipment ● Electronic Attendance & Cash Registers ● Process Instrumentation & Control ● Railway Signalling ● Power Plants & Substations ● Cellular Phones (Base Stations & Transmitters) ● Geophysical Equipment ● PCO Monitors (Electronic)

EXIDE EL RANGE OF TUBULAR MONOBLOC BATTERIES

SPECIFICATION CHART															
Type	Capacity in Ah at 27°C when discharged for			Charge Current for Initial Charging (Amps)		Minimum Ah input during Initial Charge	Approx. Battery+ Weight		Approx+ acid qty at 1.220 Sp.Gr. Litres / Cell	Overall Dimensions (in mm)			Constant Potential Limiting Current (Amps)	Trickle Charge Current (mA)	
	10 Hr. 1.75 V/Cell	10 Hr. 1.80 V/Cell (Conforms to BIS 13369)	Nominal Monobloc Unit Voltage (V)	Starting 2.35 V/Cell	Finishing 2.75 V/Cell		Without acid (Kg) +/-3%	Filled with acid (Kg) +/-3%		Length +/-3 mm	Width +/-3 mm	Height +/-3 mm		Minimum	Maximum
6EL28	28	26	12	3.50	1.75	126	11.11	16.72	4.60	260	173	240	7.00	28	112
6EL40	40	38	12	5.00	2.50	180	12.10	17.90	4.75	260	173	240	10.00	40	160
6EL50	50	47	12	6.00	3.00	225	15.17	25.17	8.20	410	176	281	12.50	50	200
6EL60	60	57	12	7.00	3.50	270	17.87	30.19	10.10	410	176	281	15.00	60	240
6EL75	75	70	12	9.00	4.50	340	23.20	32.23	7.40	410	176	281	18.75	75	300
6EL100	100	95	12	12.00	6.00	450	33.74	48.38	12.00	506	220	257	25.00	100	400

EXIDE EL TALL TUBULAR RANGE

SPECIFICATION CHART															
Type	Capacity in Ah at 27°C when discharged for			Charge Current for Initial Charging (Amps)		Minimum Ah input during Initial Charge	Approx. Battery+ Weight		Approx+ acid qty at 1.220 Sp.Gr. Litres / Cell	Overall Dimensions (in mm)			Constant Potential Limiting Current (Amps)	Trickle Charge Current (mA)	
	10 Hr. 1.75 V/Cell	10 Hr. 1.80 V/Cell (Conforms to BIS 13369)	Nominal Monobloc Unit Voltage (V)	Starting 2.35 V/Cell	Finishing 2.75 V/Cell		Without acid (Kg) +/-5%	Filled with acid (Kg) +/-5%		Length +/-3 mm	Width +/-3 mm	Height +/-3 mm		Minimum	Maximum
6EL120	120	114	12	15.00	7.50	540	34.00	63.00	23.77	500	187	421	30.00	120	480
6EL130	130	123	12	16.00	8.00	585	35.80	60.20	20.00	500	187	421	32.50	130	520
6EL160	160	152	12	20.00	10.00	720	45.00	72.00	22.13	500	187	421	40.00	160	640
6EL200	200	190	12	24.00	12.00	900	55.00	74.00	15.57	500	187	421	50.00	200	800

- For constant potential charging higher rates are permissible for maximum charger setting of 2.40 volts per cell.
- Trickle charge voltage should be adjusted to 2.25 volts per cell.
- Technical information regarding 6V EL Tubular available on request.

Initial Charging Instructions

- Fill up to the required level with battery grade dilute sulphuric acid ● Filling specific gravity: 1.220 ± 0.005 at 27°C ● Rest period: 12 hours ● Charge at 12% of C(10) capacity to 2.35 vpc and then at 6% of C(10) capacity to 2.75vpc Minimum Ah input: 450% of C10 capacity ● All parameters for 12 Volt Nominal Monobloc Units

Statutory Notice:

All batteries contain lead, which is harmful for humans and environment. As per statutory requirements, the used battery must be returned to the authorized dealer, manufacturer or at the designated collection centres.

Contact our Exide Powercentre Showrooms for Sales & Services



EXIDE TUBULAR is a product of ISO 9001 and ISO 14001 certified factories

Head Office

Kolkata 'Exide House', 59E Chowringhee Road, Kolkata - 700 020, Phone (033) 2283 2120/33/36/50/51/71/2238/39, Fax (033) 2283 2632/37

Corporate Marketing Office

Kolkata 6A Hatibagan Road, Entally, Kolkata - 700 014, Phone (033) 2286 6158/6159, Fax (033) 2286 6186, E-mail: indlcare@exide.co.in

Regional Offices

New Delhi 'Exide House', 3E/1 Link Road, Jhandewalan Extension, New Delhi - 110 055, Phone (011) 2362 7095/96/98, Fax (011) 2333 5703

Chennai Industrial Marketing Division, Economist House, 2nd Floor, Western Wing, S-15, Thiru Vi-Ka Industrial Estate, Guindy, Chennai - 600 032, Phone (044) 2250 0726, 1326, 1216, Fax (044) 2250 1216

Mumbai 'RAHEJAS', 5th Floor, 8C Main Avenue, V P Road, Santacruz (West), Mumbai - 400 054, Phone (022) 2646 5283/84, Fax (022) 2646 5042

Kolkata 6A Hatibagan Road, Entally, Kolkata - 700 014, Phone (033) 2284 3137/3168/3169, Fax (033) 2289 7455

Branch Offices

Cuttack Phone (0671) 268 6151

Guwahati Phone (0361) 234 2500/1119, Fax (0361) 234 5097 (PP)

Jamshedpur Phone (0657) 229 3022/0785, Fax (0657) 229 0894 (PP)

Patna Phone (0612) 257 0415, 645 8102/8103, Fax (0612) 252 9902 (PP)

Siliguri Phone (0353) 254 0321

Chandigarh Phone (0172) 500 0014, Fax (0172) 265 4395

Dehradun Phone (0135) 324 7766

Ghaziabad Phone (0120) 411 7952, 416 4419

Jaipur Phone (0141) 229 3799/04, Fax (0141) 229 2877

Jalandhar Phone (0181) 223 7870, 653 4983, Fax (0181) 245 9571

Lucknow Phone (0522) 404 1896/1899, Fax (0522) 221 8089

Varanasi Phone (0542) 250 1680, Fax (0542) 250 1296

Bangalore Phone (080) 4128 3793/3493/3477, Fax (080) 2357 8672

Coimbatore Phone (0422) 222 1846, Fax (0422) 222 0858

Hyderabad Phone (040) 6516 3958, Fax (040) 4019 6054

Kochi Phone (0484) 414 9351, Fax (0484) 253 0797

Ahmedabad Phone (079) 685 9661/6697/6698, Fax (079) 685 6698

Indore Phone (0731) 255 6290/91, Fax (0731) 249 3395

Mumbai Phone (022) 2646 5283/84, Fax (022) 2646 5042

Nagpur Phone (0712) 5615 8823/83, 259 4722, Fax (0712) 259 4722

Pune Phone (020) 401 1083/84/85/86, Fax (020) 612 6426

Vadodara Telefax (0265) 235 4240

This catalogue is issued to provide outline information only and is not deemed to form part of an offer or contract. Our policy is one of continued improvement and we reserve the right to change details without prior notice.

PHX/EL/12K/3-2010

*Applied for
+ Estimated

E-mail: indlcare@exide.co.in, Visit us at www.exide4u.com
Toll Free No. 1800-103-5454